

Connectors and Pockets for Thermometers

Ø 10 mm


Date: June 2003

Sheet No.: 3-99GB


When correctly tightened, connectors will resist pressures of up to 50 bar.

Pockets are recommended where it may be necessary to change the thermometer while the plant is still working (See overleaf).

When ordering, please state: Part number.

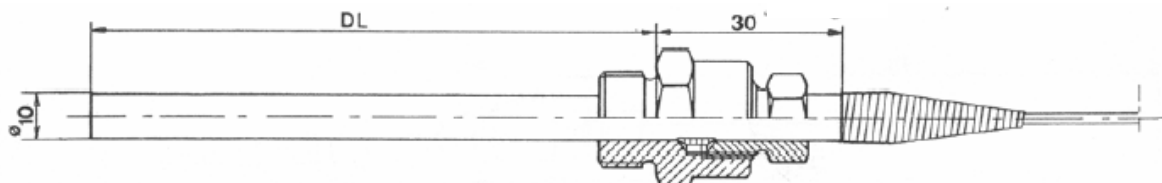

ADJUSTABLE NIPPLE, (MALE)			
	THREAD	3/8" BSP	1/2" BSP
Steel	Part no.		3264
Stainless steel, AISI316	Part no.	4410	4411

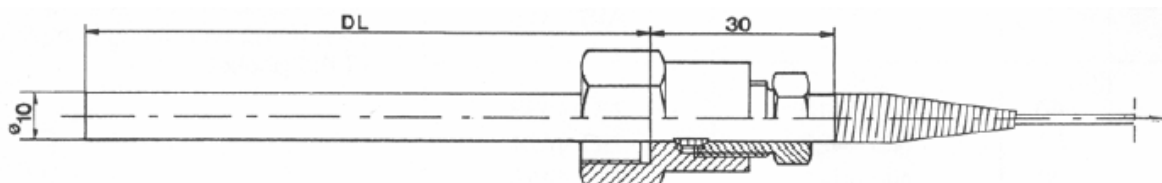

ADJUSTABLE NIPPLE, (FEMALE)			
	THREAD	3/8" BSP	1/2" BSP
Steel	Part no.		4415
Stainless steel, AISI316	Part no.	4416	4417


TEMPRESS reserves the right to changes without notice



TEMPRESS A/S

Nordlandsvej 64-66
DK-8240 Risskov, Denmark
Tel.: +45 8932 5200
Fax.: +45 8932 5213
tempress@tempress.dk
www.tempress.dk

Pockets for thermometers, Ø10 mm
Pockets will resist pressures of up to 50 Bar.

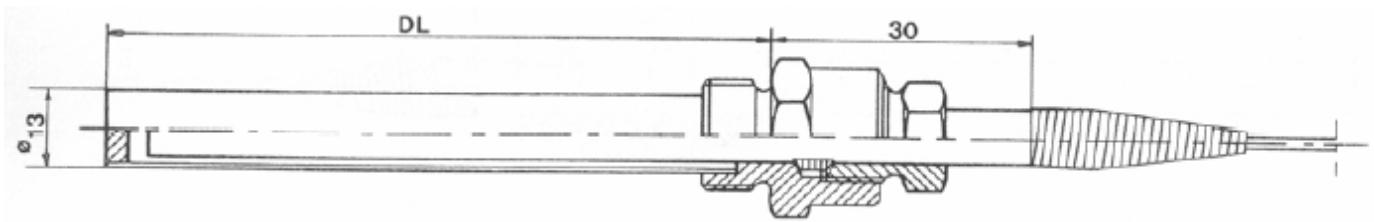

When ordering please state: Part no.

Thread	DL	Steel	Stainless steel AISI316
3/8" BSP	40	No. 4421	No. 4433
	63		No. 4434
	100		No. 4435
	160		No. 4436
	260		No. 4437
1/2" BSP	40	No. 4424	No. 4438
	63	No. 4425	No. 4439
	100	No. 4426	No. 4440
	160	No. 4427	No. 4441
	250	No. 4428	No. 4442

NOTE: When specifying pockets of this type, no other connector will be required as a gland type fitting is built into the top of the pocket.