

Connectors and Pockets for Thermometers

Ø 13 mm


Date: June 2003

Sheet No.: 3-100GB


When correctly tightened, connectors will resist pressures of up to 50 bar.

Pockets are recommended where it may be necessary to change the thermometer while the plant is still working (See overleaf).

When ordering, please state: Part number.

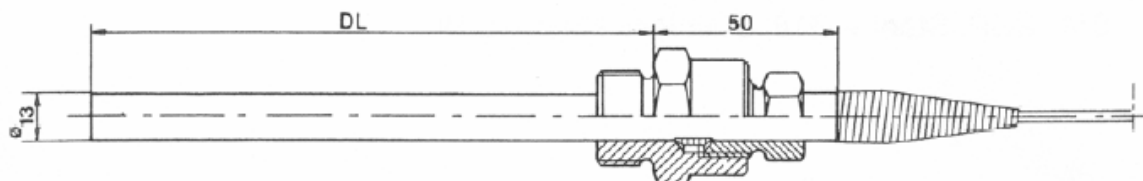

ADJUSTABLE NIPPLE, (MALE)			
	THREAD	1/2" BSP	3/4" BSP
Steel	Part no.	927	1567
Stainless steel, AISI316	Part no.	2225	4138

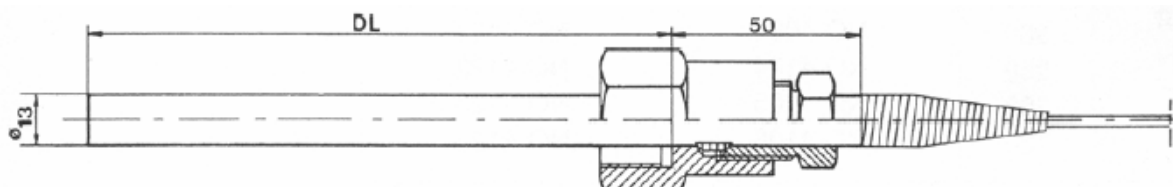

ADJUSTABLE NIPPLE, (FEMALE)			
	THREAD	1/2" BSP	3/4" BSP
Steel	Part no.	4027	2361
Stainless steel, AISI316	Part no.	4091	


TEMPRESS reserves the right to changes without notice



TEMPRESS A/S

Nordlandsvej 64-66
DK-8240 Risskov, Denmark
Tel.: +45 8932 5200
Fax.: +45 8932 5213
tempress@tempress.dk
www.tempress.dk

Pockets for thermometers, Ø13 mm
Pockets will resist pressures of up to 50 Bar

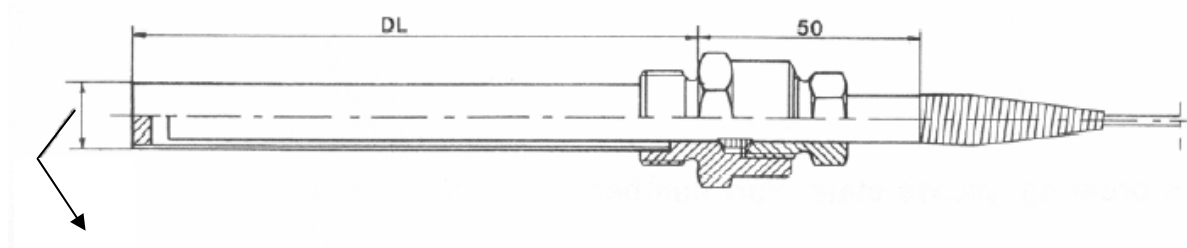

1/2" BSP: Steel = Ø16, Stainless steel = Ø16
 3/4" BSP: Steel = Ø18, Stainless steel = Ø16

When ordering please state: Part no.

Thread	DL	Steel	Stainless steel AISI316
1/2" BSP	63	No. 2116	No. 2354
	100	No. 4093	No. 4119
	150	No. 4095	No. 4120
	200	No. 4096	No. 4121
	250	No. 4104	No. 4122
	300	No. 4105	No. 4123
3/4" BSP	63	No. 5125	No. 4064
	100	No. 3132	No. 474
	150	No. 4097	No. 4133
	200	No. 3016	No. 4134
	250	No. 4100	No. 4135
	300	No. 4101	No. 4136
	400	No. 4103	

NOTE: When specifying pockets of this type, no other connector will be required as a gland type fitting is built into the top of the pocket.