


Lower part acc. to ISO 2852 (for TR7604), max. 60 bar (870 psi)

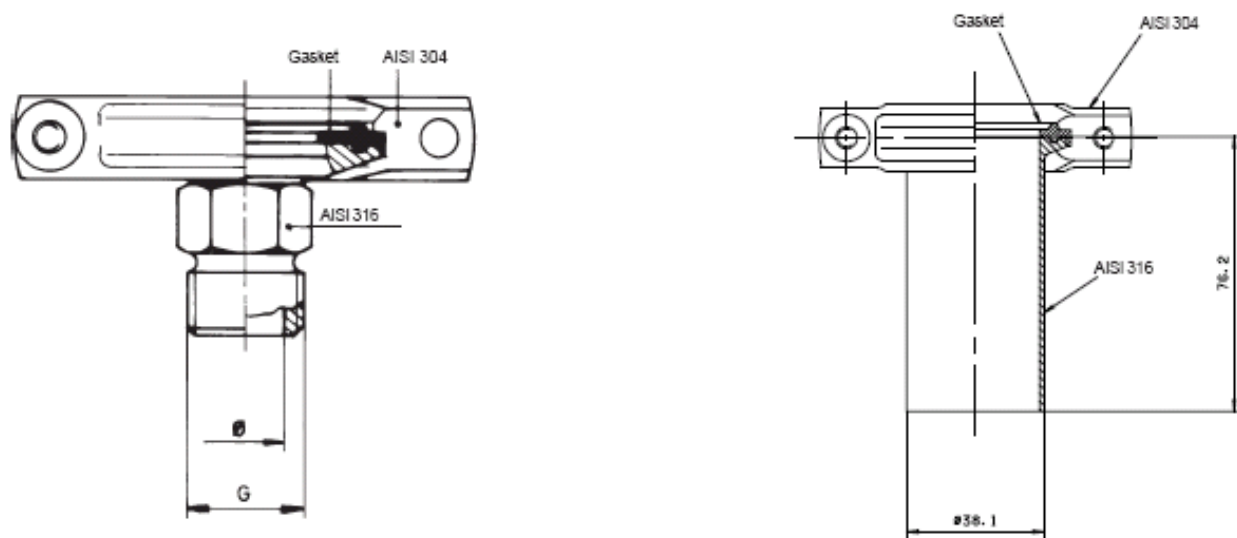

Ordering key		
G - thread	Ø - internal boring	Part number
G $\frac{3}{8}$ B	11 mm	7322
G $\frac{1}{2}$ B	14 mm	7323
Gasket <small>(7319 NBR gasket is incl. in 7322 and 7323)</small>	NBR rubber < 90°C (195°F)	7319
	PTFE teflon < 130°C (265°F)	8704

Ordering key		
Nom. size	Ø - external diameter	Part number
1½" (DN38)	38,6 mm	8707
Gasket <small>(7319 NBR gasket is incl. in 8707)</small>	NBR rubber < 90°C (195°F)	7319
	PTFE teflon < 130°C (265°F)	8704